BUL147

SWITCHMODE™

NPN Bipolar Power Transistor For Switching Power Supply Applications

The BUL147 have an applications specific state−of−the−art die designed for use in electric fluorescent lamp ballasts to 180 Watts and in Switchmode Power supplies for all types of electronic equipment.

Features

- Improved Efficiency Due to Low Base Drive Requirements:
  - ♦ High and Flat DC Current Gain
  - ♦ Fast Switching
  - ♦ No Coil Required in Base Circuit for Turn−Off (No Current Tail)
- Parametric Distributions are Tight and Consistent Lot−to−Lot
- Two Package Choices: Standard TO−220 or Isolated TO−220
- Pb−Free Package is Available*

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Collector−Emitter Sustaining Voltage		V_{CEO}	400	Vdc
Collector−Base Breakdown Voltage		V_{CES}	700	Vdc
Emitter−Base Voltage		V_{EBO}	9.0	Vdc
Collector Current	− Continuous − Peak (Note 1)	I_C I_{CM}	8.0 16	Adc
Base Current	− Continuous − Peak (Note 1)	I_B I_{BM}	4.0 8.0	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C		P_D	125 1.0	W W/°C
Operating and Storage Temperature		T_J, T_{stg}	−65 to 150	°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction−to−Case	$R_{\theta JC}$	1.0	°C/W
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes 1/8″ from Case for 5 Seconds	T_L	260	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor®


http://onsemi.com

POWER TRANSISTOR 8.0 AMPERES, 700 VOLTS, 45 AND 125 WATTS



TO−220AB
CASE 221A−09
STYLE 1

MARKING DIAGRAM



BUL147 = Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb−Free Package

ORDERING INFORMATION

Device	Package	Shipping
BUL147	TO−220	50 Units / Rail
BUL147G	TO−220 (Pb−Free)	50 Units / Rail

© Semiconductor Components Industries, LLC, 2006

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic				Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS								
Collector−Emitter Sustaining Voltage (I_C = 100 mA, L = 25 mH)				$V_{CEO(sus)}$	400	–	–	Vdc
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, I_B = 0)				I_{CEO}	–	–	100	μAdc
Collector Cutoff Current (V_{CE} = Rated V_{CES}, V_{EB} = 0)				I_{CES}	–	–	100	μAdc
			(T_C = 125°C)		–	–	500	
(V_{CE} = 500 V, V_{EB} = 0)			(T_C = 125°C)		–	–	100	
Emitter Cutoff Current (V_{EB} = 9.0 Vdc, I_C = 0)				I_{EBO}	–	–	100	μAdc
ON CHARACTERISTICS								
Base−Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 0.2 Adc)				$V_{BE(sat)}$	–	0.82	1.1	Vdc
(I_C = 4.5 Adc, I_B = 0.9 Adc)					–	0.92	1.25	
Collector−Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 0.2 Adc)				$V_{CE(sat)}$	–	0.25	0.5	Vdc
			(T_C = 125°C)		–	0.3	0.5	
(I_C = 4.5 Adc, I_B = 0.9 Adc)					–	0.35	0.7	
			(T_C = 125°C)		–	0.35	0.8	
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)				h_{FE}	14	–	34	–
			(T_C = 125°C)		–	30	–	
(I_C = 4.5 Adc, V_{CE} = 1.0 Vdc)					8.0	12	–	
			(T_C = 125°C)		7.0	11	–	
(I_C = 2.0 Adc, V_{CE} = 1.0 Vdc)			(T_C = 25°C to 125°C)		10	18	–	
(I_C = 10 mAdc, V_{CE} = 5.0 Vdc)					10	20	–	
DYNAMIC CHARACTERISTICS								
Current Gain Bandwidth (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)				f_T	–	14	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)				C_{ob}	–	100	175	pF
Input Capacitance (V_{EB} = 8.0 V)				C_{ib}	–	1750	2500	pF
Dynamic Saturation Voltage: Determined 1.0 μs and 3.0 μs respectively after rising I_{B1} reaches 90% of final I_{B1} (see Figure 18)	(I_C = 2.0 Adc I_{B1} = 200 mAdc V_{CC} = 300 V)	1.0 μs	(T_C = 125°C)	$V_{CE(dsat)}$	–	3.0	–	V
					–	5.5	–	
		3.0 μs	(T_C = 125°C)		–	0.8	–	
					–	1.4	–	
	(I_C = 5.0 Adc I_{B1} = 0.9 Adc V_{CC} = 300 V)	1.0 μs	(T_C = 125°C)		–	3.3	–	
					–	8.5	–	
		3.0 μs	(T_C = 125°C)		–	0.4	–	
					–	1.0	–	

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted) (continued)

Characteristic		Symbol	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS: Resistive Load (D.C. ≤ 10%, Pulse Width = 20 μs)						
Turn−On Time	(I_C = 2.0 Adc, I_{B1} = 0.2 Adc, I_{B2} = 1.0 Adc, V_{CC} = 300 V)	t_{on}	– –	200 190	350 –	ns
	(T_C = 125°C)					
Turn−Off Time		t_{off}	– –	1.0 1.6	2.5 –	μs
	(T_C = 125°C)					
Turn−On Time	(I_C = 4.5 Adc, I_{B1} = 0.9 Adc, I_{B1} = 2.25 Adc, V_{CC} = 300 V)	t_{on}	– –	85 100	150 –	ns
	(T_C = 125°C)					
Turn−Off Time		t_{off}	– –	1.5 2.0	2.5 –	μs
	(T_C = 125°C)					
SWITCHING CHARACTERISTICS: Inductive Load (V_{clamp} = 300 V, V_{CC} = 15 V, L = 200 μH)						
Fall Time	(I_C = 2.0 Adc, I_{B1} = 0.2 Adc, I_{B2} = 1.0 Adc)	t_{fi}	– –	100 120	180 –	ns
	(T_C = 125°C)					
Storage Time		t_{si}	– –	1.3 1.9	2.5 –	μs
	(T_C = 125°C)					
Crossover Time		t_c	– –	210 230	350 –	ns
	(T_C = 125°C)					
Fall Time	(I_C = 4.5 Adc, I_{B1} = 0.9 Adc, I_{B2} = 2.25 Adc)	t_{fi}	– –	80 100	150 –	ns
	(T_C = 125°C)					
Storage Time		t_{si}	– –	1.6 2.1	3.2 –	μs
	(T_C = 125°C)					
Crossover Time		t_c	– –	170 200	300 –	ns
	(T_C = 125°C)					
Fall Time	(I_C = 4.5 Adc, I_{B1} = 0.9 Adc, I_{B2} = 0.9 Adc)	t_{fi}	60 –	– 150	180 –	ns
	(T_C = 125°C)					
Storage Time		t_{si}	2.6 –	– 4.3	3.8 –	μs
	(T_C = 125°C)					
Crossover Time		t_c	– –	200 330	350 –	ns
	(T_C = 125°C)					

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

TYPICAL STATIC CHARACTERISTICS

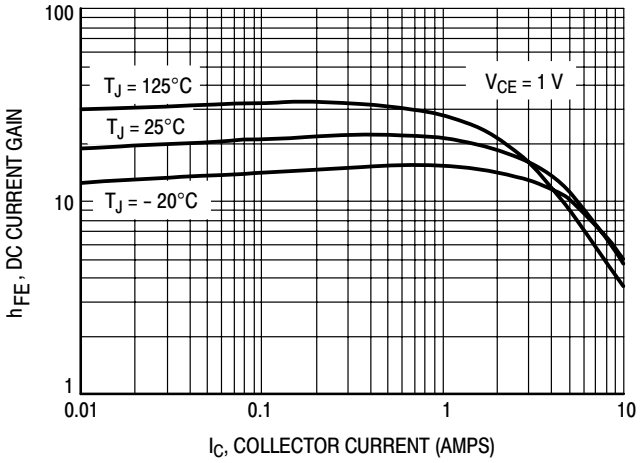


Figure 1. DC Current Gain @ 1 Volt

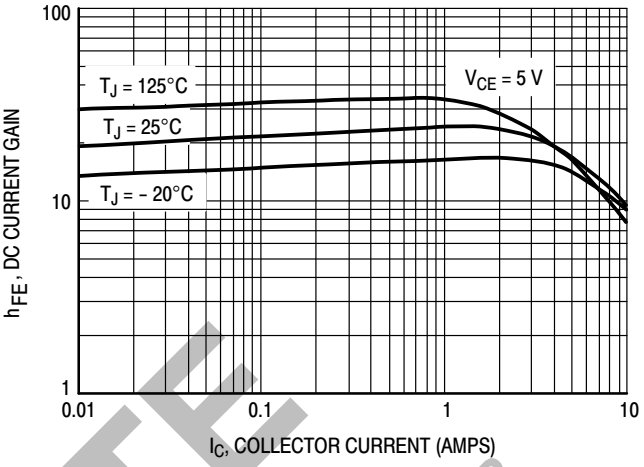


Figure 2. DC Current Gain @ 5 Volts

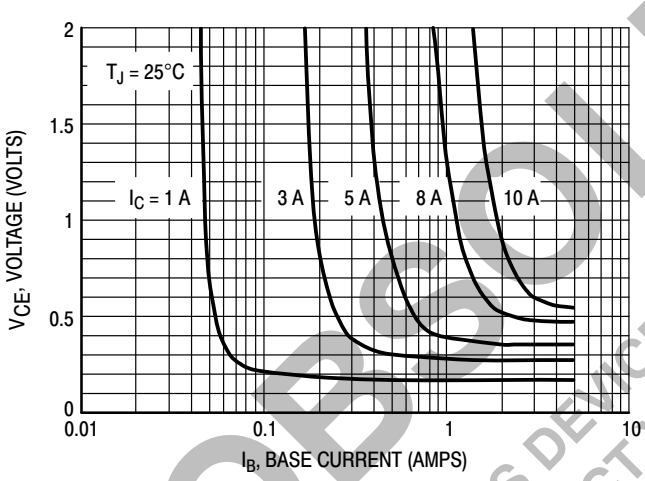


Figure 3. Collector Saturation Region

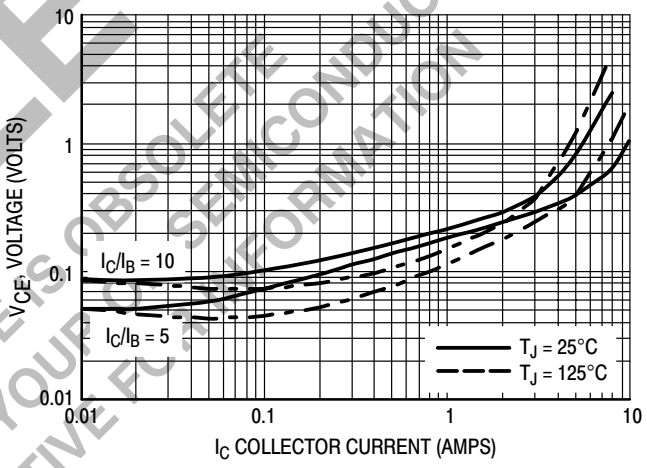


Figure 4. Collector−Emitter Saturation Voltage

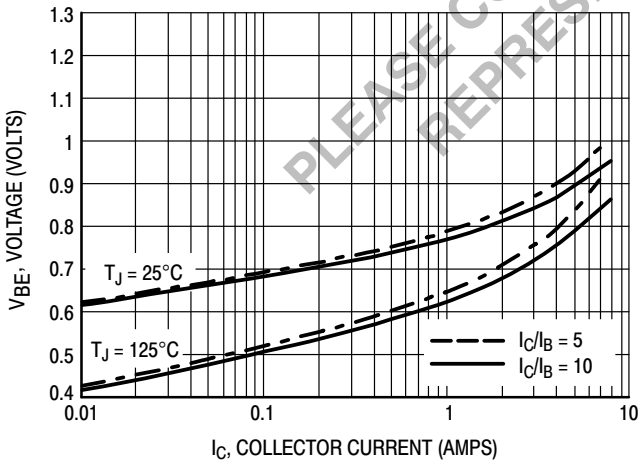


Figure 5. Base−Emitter Saturation Region

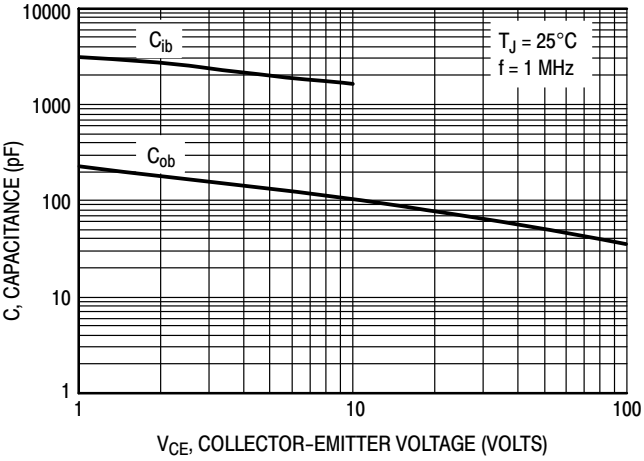


Figure 6. Capacitance

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

TYPICAL SWITCHING CHARACTERISTICS
(I_{B2} = I_C/2 for all switching)

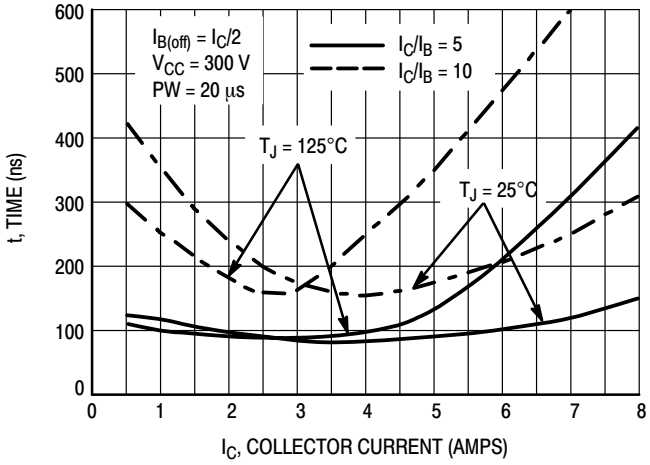


Figure 7. Resistive Switching, t_{on}

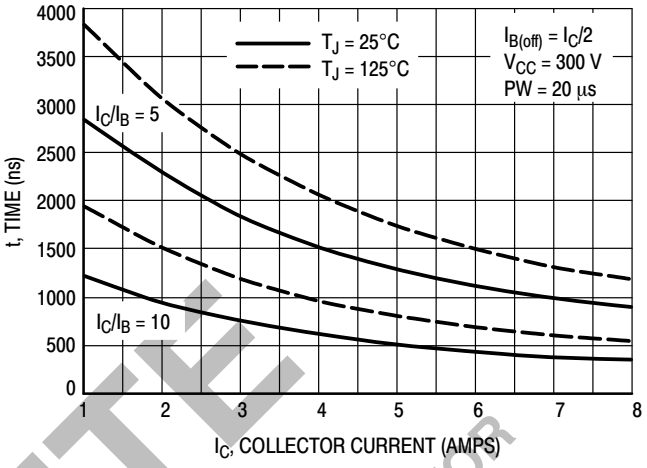


Figure 8. Resistive Switching, t_{off}

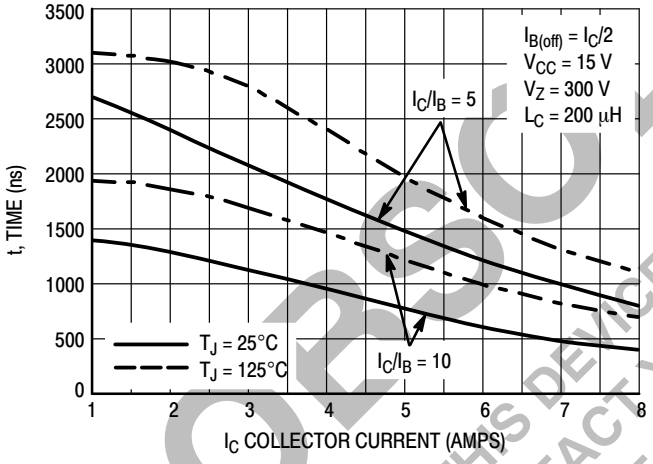


Figure 9. Inductive Storage Time, t_{si}

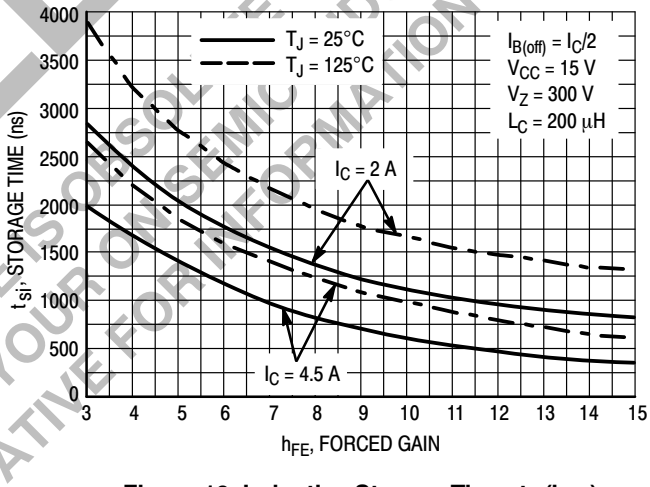


Figure 10. Inductive Storage Time, $t_{si}(h_{FE})$

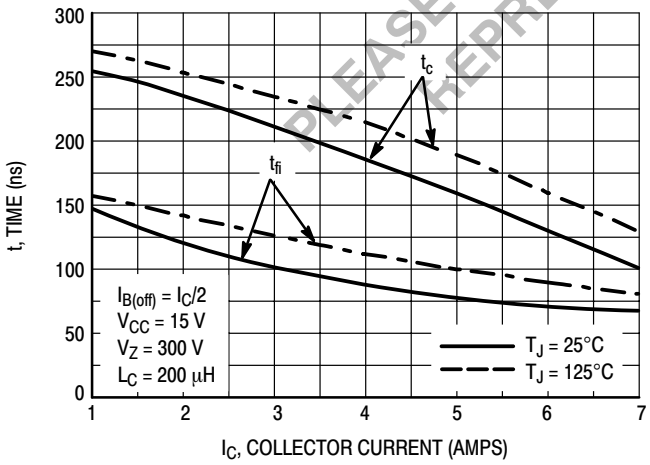


Figure 11. Inductive Switching, t_c and t_{fi}
I_C/I_B = 5

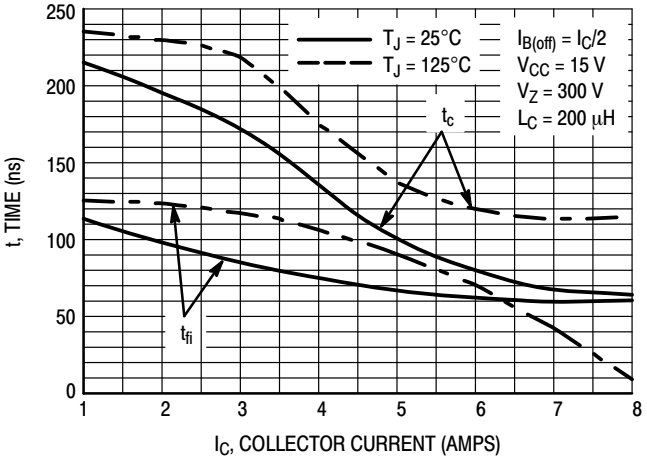


Figure 12. Inductive Switching, t_c and t_{fi}
I_C/I_B = 10

ORDERING INFORMATION
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ONSEMI REPRESENTATIVE FOR INFORMATION

TYPICAL SWITCHING CHARACTERISTICS
(I_{B2} = I_C/2 for all switching)

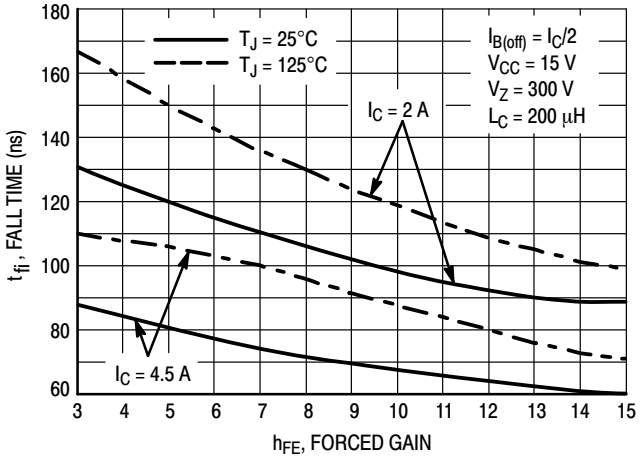


Figure 13. Inductive Fall Time

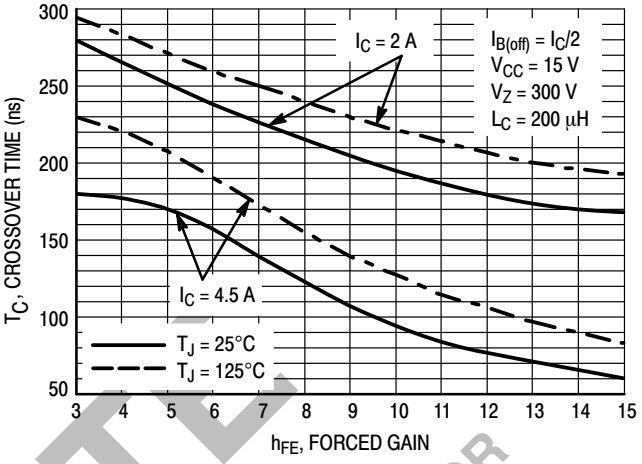


Figure 14. Inductive Crossover Time

GUARANTEED SAFE OPERATING AREA INFORMATION

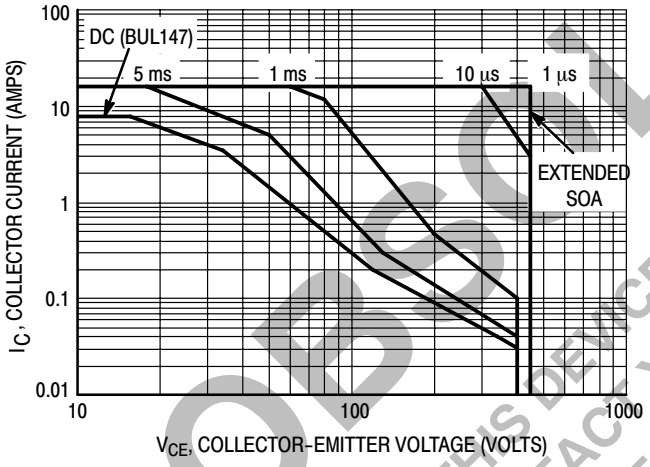


Figure 15. Forward Bias Safe Operating Area

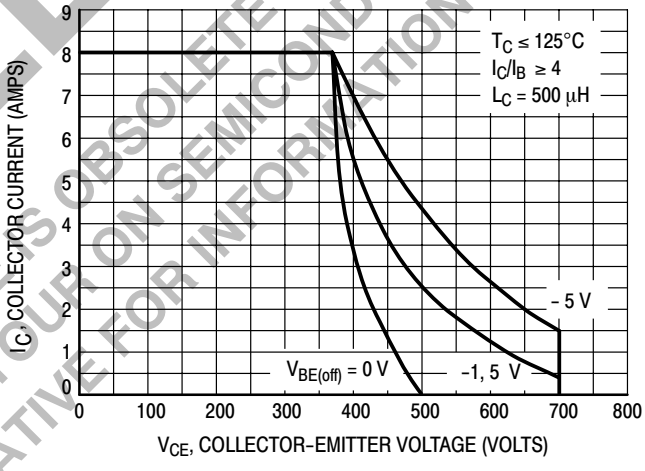


Figure 16. Reverse Bias Switching Safe Operating Area

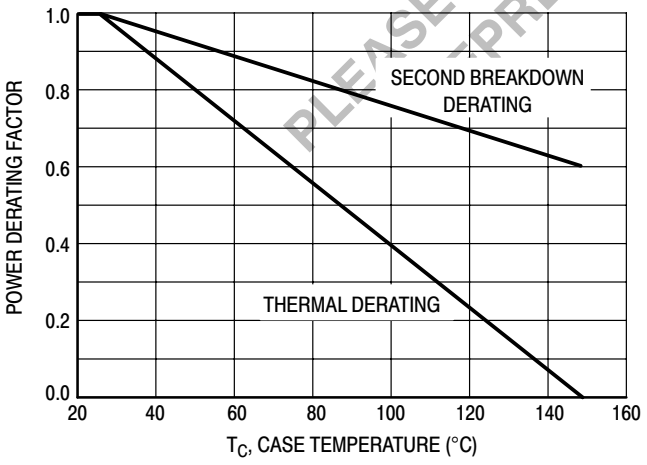


Figure 17. Forward Bias Power Derating

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when T_C > 25°C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown in Figure 15 may be found at any case temperature by using the appropriate curve on Figure 17. $T_{J(pk)}$ may be calculated from the data in Figure 20. At any case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. For inductive loads, high voltage and current must be sustained simultaneously during turn−off with the base−to−emitter junction reverse−biased. The safe level is specified as a reverse−biased safe operating area (Figure 16). This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode.

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

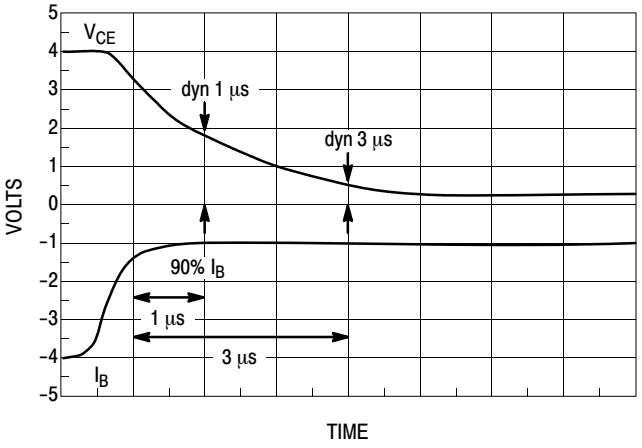


Figure 18. Dynamic Saturation Voltage Measurements


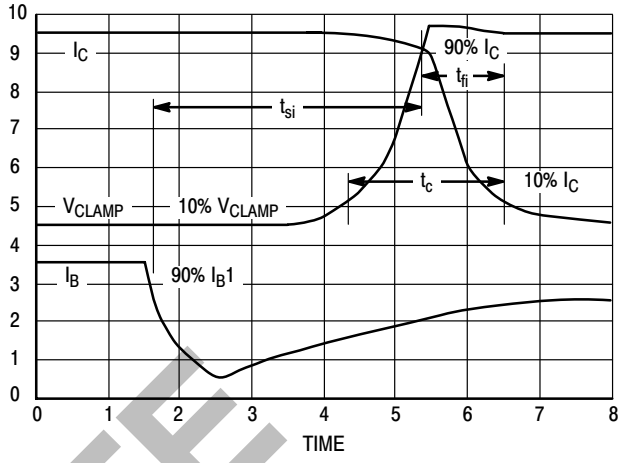


Figure 19. Inductive Switching Measurements

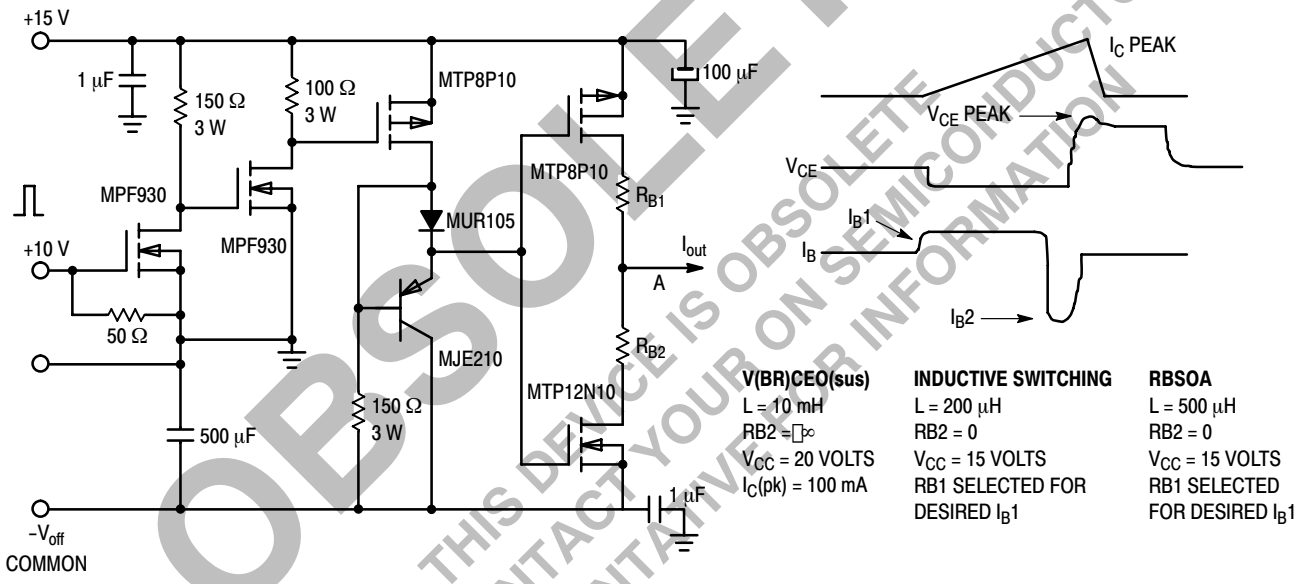

V(BR)CEO(sus)	INDUCTIVE SWITCHING	RBSOA
L = 10 mH	L = 200 μH	L = 500 μH
RB2 = ∞	RB2 = 0	RB2 = 0
V_{CC} = 20 VOLTS	V_{CC} = 15 VOLTS	V_{CC} = 15 VOLTS
I_C(pk) = 100 mA	RB1 SELECTED FOR DESIRED I_B1	RB1 SELECTED FOR DESIRED I_B1

Table 1. Inductive Load Switching Drive Circuit

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

TYPICAL THERMAL RESPONSE


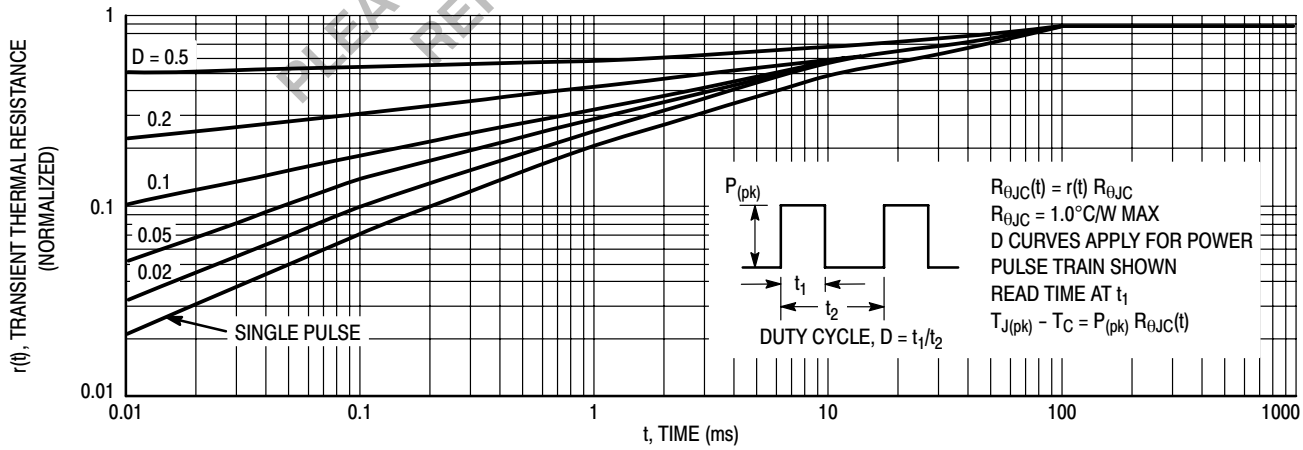


Figure 20. Typical Thermal Response ($Z_{\theta JC}(t)$) for BUL147

PACKAGE DIMENSIONS

TO−220AB
CASE 221A−09
ISSUE AA

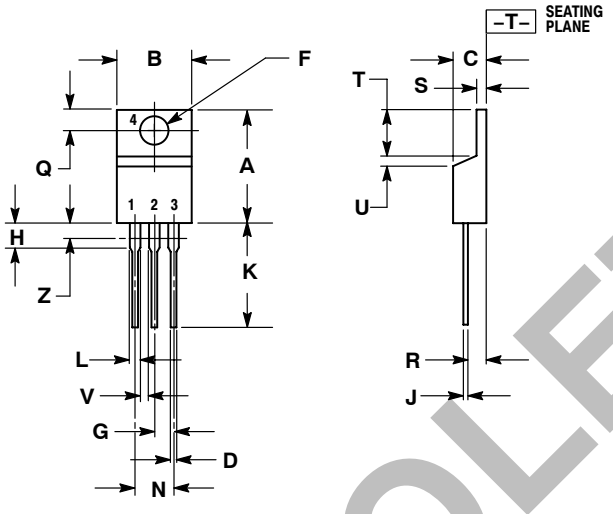

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

OBSOLETE
THIS DEVICE IS OBSOLETE
PLEASE CONTACT YOUR ON SEMICONDUCTOR
REPRESENTATIVE FOR INFORMATION

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5773−3850

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

BUL147/D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor:

BUL147 BUL147G